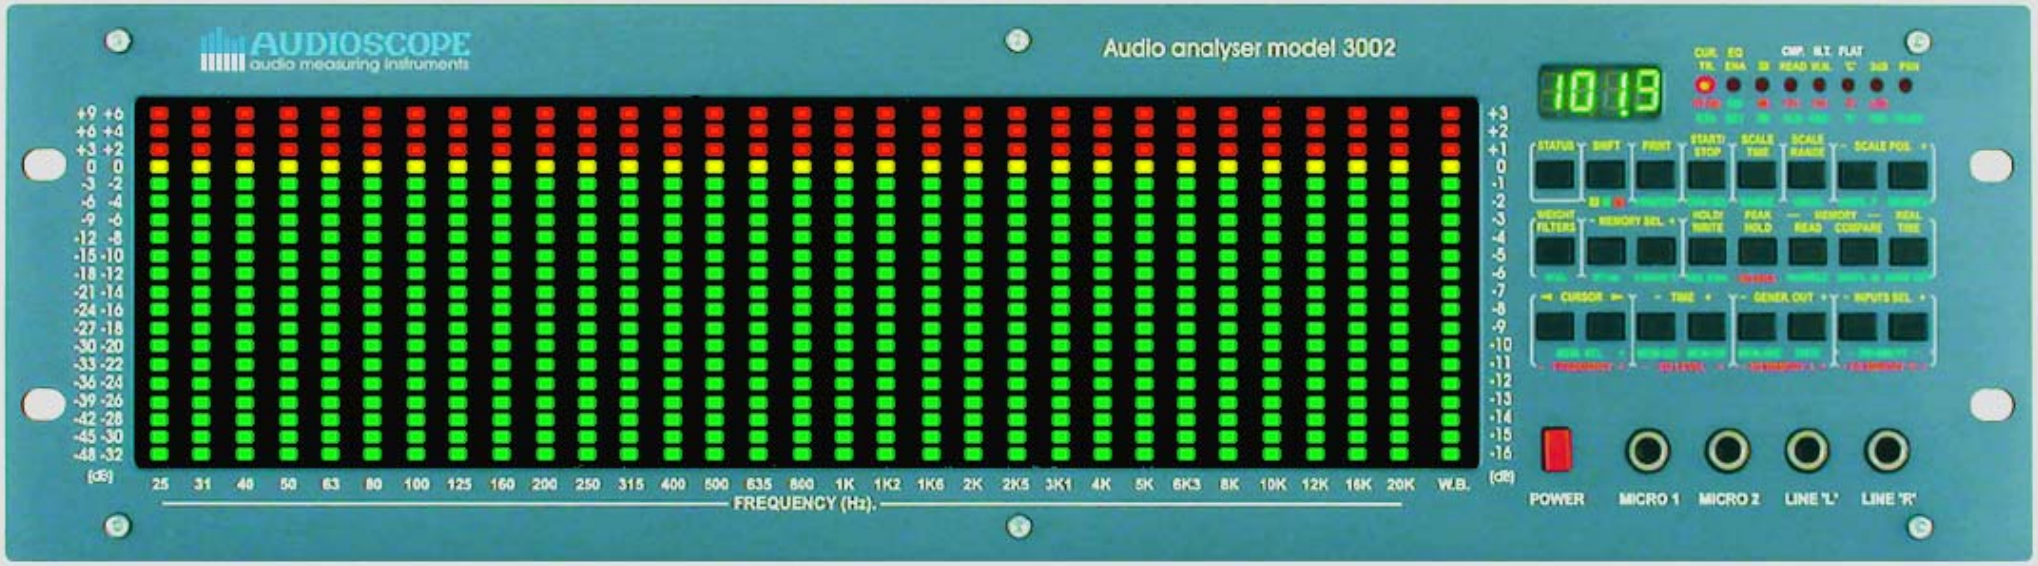
AUDIOSCOPE
audio measuring instruments
Audio analyser model 3002
(dB)
25 31 40 50 63 80 100 125 160 200 250 315 400 500 635 800 1K 1K2 1K6 2K 2K5 3K1 4K 5K 6K3 8K 10K 12K 16K 20K W.B.
FREQUENCY (Hz).
POWER
MICRO 1
MICRO 2
LINE 'L'
LINE 'R'

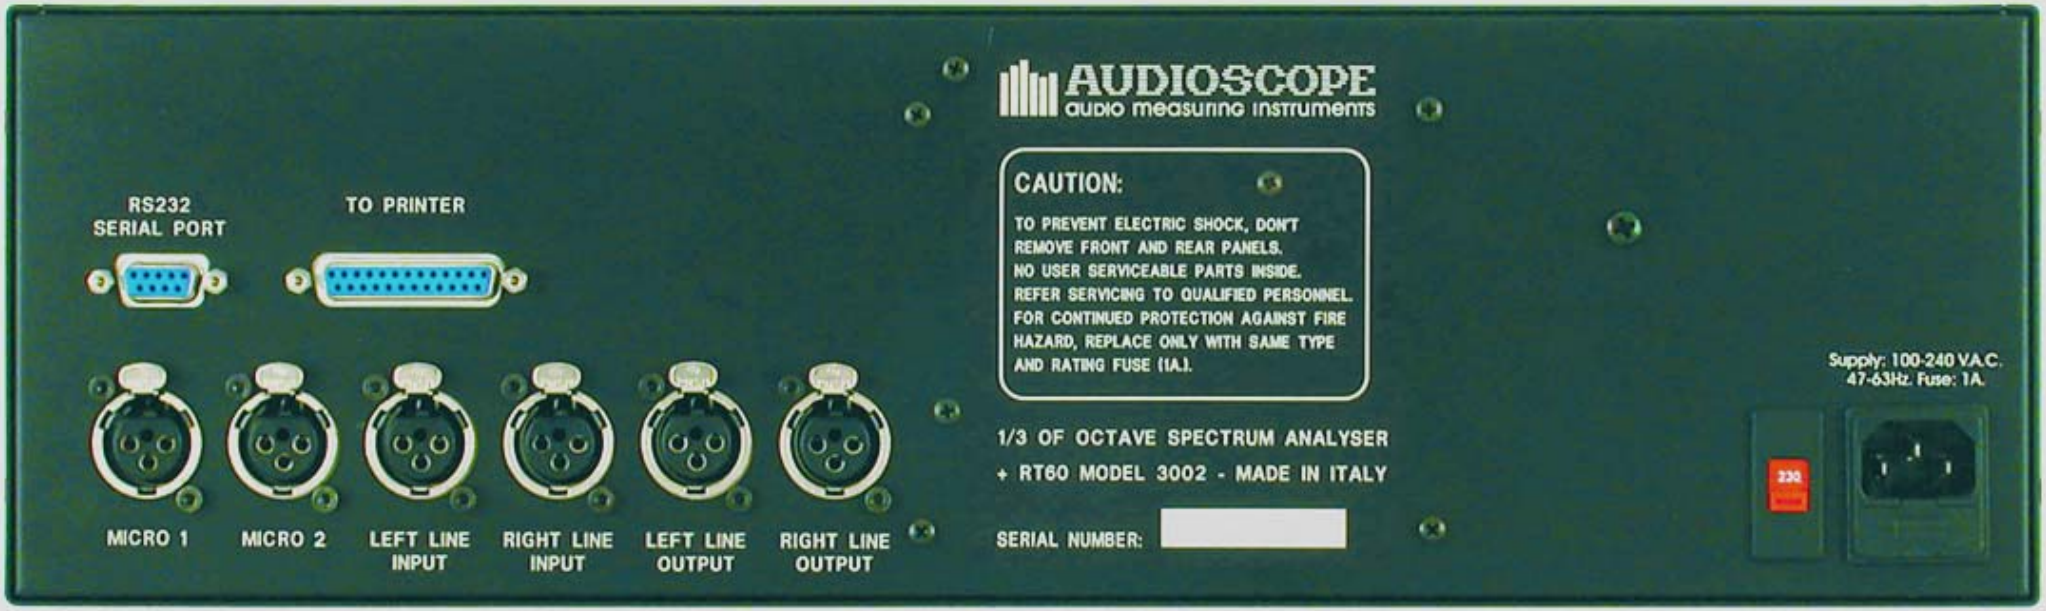
AUDIOSCOPE
audio measuring instruments
RS232
SERIAL PORT
TO PRINTER
CAUTION:
TO PREVENT ELECTRIC SHOCK, DON'T REMOVE FRONT AND REAR PANELS.
NO USER SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED PERSONNEL.
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH SAME TYPE AND RATING FUSE (1A.).
Supply: 100-240 V.A.C.
47-63Hz. Fuse: 1A.
1/3 OF OCTAVE SPECTRUM ANALYSER
+ RT60 MODEL 3002 - MADE IN ITALY
SERIAL NUMBER:
MICRO 1
MICRO 2
LEFT LINE INPUT
RIGHT LINE INPUT
LEFT LINE OUTPUT
RIGHT LINE OUTPUT